

Two-roller/Three-roller ironing machine


Features:

Used to process non-glue wadding, spray bonded wadding, stiff/hard wadding, needle punching felt, non-woven fabrics, linoleum cloth and other products to make surface smooth, flat, and increase its quality and toughness.

The machine has two kinds of structure: two roller vertical or three roller vertical. Electrical heating, or heat conduction oil boiler heating.

The main frame is welded by high quality carbon steel plate. The lower roller is fixed, the upper roller is manually raised and lowered (three rollers vertical by cylinder control lift up or down), the adjustment range is 0-100mm.

Hot roller $\varnothing 400\text{mm}$, roller length 2800mm, the surface of fine grinding hard chrome plating

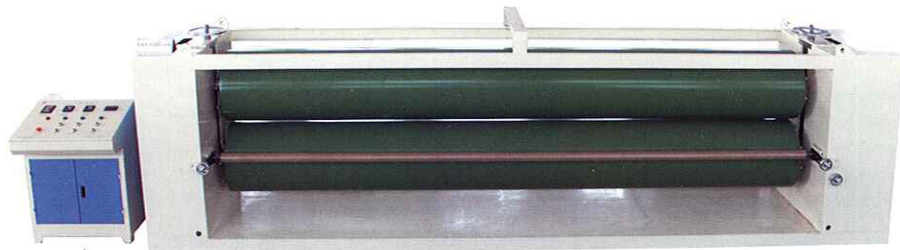

Surface temperature 140-230 degrees can be adjustable.

The main drive adopts variable frequency speed control motor with worm gear reduction drive

Line speed: 6000-15000mm / min. Heating power: 36kW

Total power: 38.2kW

Width: 2800mm (1600 ~ 7200mm can be customized)

